


## MTW 72 assembly carriage with MGB center cornice platform

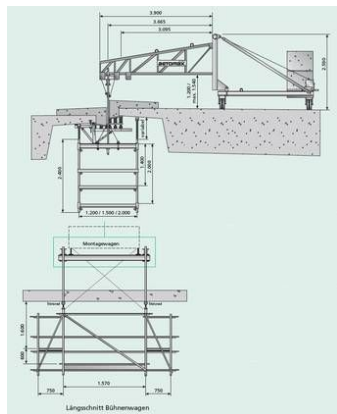

This combination is used especially in the area of the central cornice. The stage platform offers ideal conditions for assembly work and visual inspections under the bridge. The flow of traffic on the side of the bridge that is being used is not affected.

The middle cornice platform can be flanged to the BETOMAX® assembly trolley MTW 72 with the help of the additional traverse

For assembly work below the bridge

Working platform is available in widths of 1.20 m, 1.50 m or 2.00 m

Can be used as a pre and post runner

Space-saving one-sided operation

No additional structure required; Stage is delivered completely pre-assembled

Scaffold tube construction with perforated sheets as floor

Other stage dimensions on request

Permissible platform load:

100 kg per m<sup>2</sup> and 200 kg moving single load

### Comment to article

Rent on request.

Article number	Title of variant	Packaging piece/ metre/ metre by the metre/ bucket/ bag/ bundle/ box/ can	Weight kg/piece
44620000	MTW 72 with chassis and outrigger	1 piece	1'309,8
44633150	MGB centre cornice platform (length: 3 m; width: 1,50 m)	1 piece	1'290
44633200	MGB centre cornice stage (length: 3 m; width: 2,00 m)	1 piece	1'450
44282004	Ballast weight for MTW 72 (4 pieces required)	1 piece	1'125